
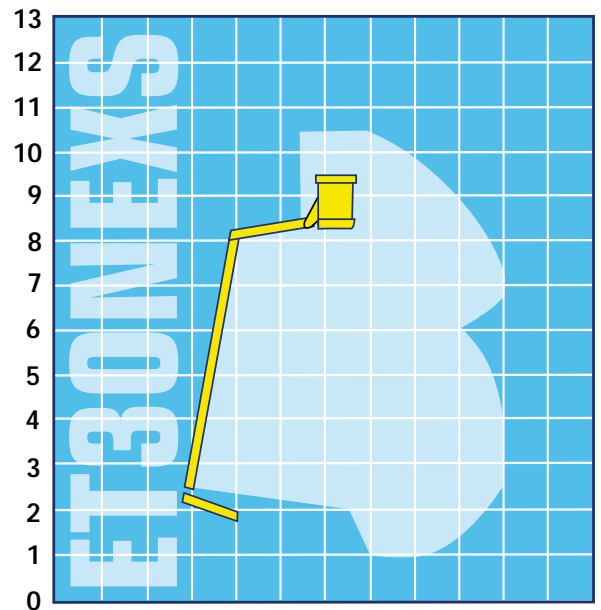


VERSALIFT

ET26/30NEXS

MINITEL jackless one man operation

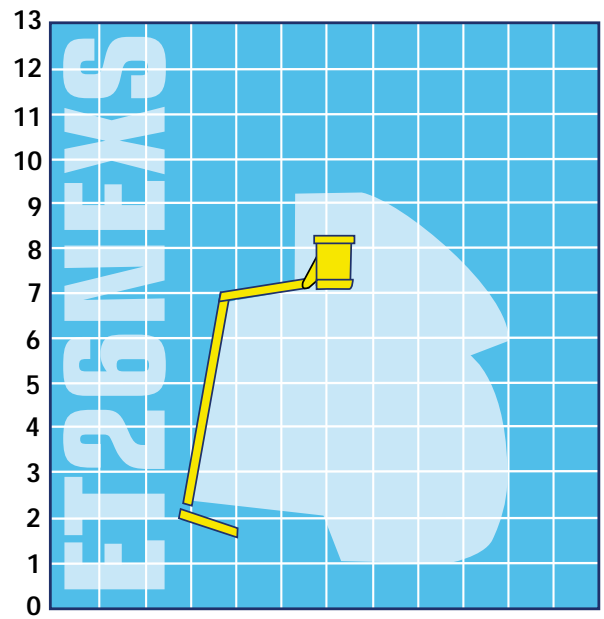

All dimensions in metres Reach of ET26/30NEXS

specifications

	ET26NEXS	ET30NEXS
max. working height	9.2m	10.5m
max. platform height	7.2m	8.5m
max. horizontal outreach	6.0m	6.0m
turret rotation (non continuous)	360°	360°
platform capacity (SWL)	120kg	120kg
vehicle type	van / chassis cab	
min. GVW	2900kg	2900kg
typical wheelbase	3.1m	3.5m
typical spare payload 2900kg GVW van (with passenger)	160kg	140kg
typical spare payload 3500 tonne GVW van (with passenger)	550kg	530kg



Maximum working height and horizontal outreach subject to vehicle. All spare payloads given include driver, passenger and fuel. Versalift is certified to ISO 9001: 2000 by TUV UK quality assurance Ltd; number GB00468.



Our new walk-in cage is an ergonomically designed alternative to conventional bob-under buckets.

ET26/30NEXS

MINITEL jackless one man operation



Telescopic boom models



Fixed flyboom



Jackless models



Up to 10.5m



Up to 6m



VERSALIFT



www.versalift.co.uk

1 Altendiez Way, Latimer Park, Burton Latimer, Northants. NN15 5YT
Tel: 01536 721010 Fax: 01536 721111 email: sales@versalift.co.uk

The photographs in this brochure are for promotional purposes only. Specifications are subject to change without notice.

ET26/30NEXS

minitel JACKLESS one man operation

Designed for use without stabilisers. Versalift NEXS models offer a level of versatility that our competitors cannot match. Ideal for narrow urban environments, very quick to set up and cause no damage to block paving. Literally apply the hand brake, switch on PTO, enter the bucket and you are ready to go!

Versalift offers extensive customer support, pre - sales help and advice and demonstrator units. Full after sales service and spare parts are usually available within 24hrs. Product service training and IPAF operator courses are also available. All platforms feature a one year parts and labour warranty, with an optional three year extended warranty and a range of Repair and Maintenance contracts available at extra cost.



ET30NEXS



comment

Ideal for urban operating environments
 Ideal for CCTV and amenity / urban street lighting operations
 Ready to Go vans (RTG) often in stock, please enquire



features & benefits

- Super lightweight platforms for greater spare payload
- Emergency stop at platform and pedestal
- Fits on ultra compact 2.9 tonne GVW vehicles
- Full functions at ground on 5m wander lead
- No tailswing beyond mirrors
- Aluminium inner telescopic boom
- Full platform function emergency power
- Steel outer boom and pedestal
- Two man versions with stabilisers available on 3.5t GVW vans with restricted outreach
- Van or truck mount
- Critical fasteners are torqued and sealed



Training



Walk-in bucket



360° non-continuous



Up to 120kg