

A particular benefit offered by the heavy duty 'Stabitel' model is the ability to fit a material handling unit (jib and winch), which facilitates greater efficiencies when working on highway lighting, as it enables the light head to be winched and held for installation, negating the need for additional support vehicles.

specifications

	VST236N/MH	VST240N/MH	VST5000N/MH
max. working height	13.4m	14.8m	17.0m
max. platform height	11.4m	12.8m	15.0m
hor outreach@200kg SWL	8.3m	9.5m	11.5m
hor outreach@250kg SWL	7.2m	7.3m	9.5m
hor outreach with MH@200kg SWL	7.2m	7.3m	9.5m
articulated lower boom	0° to 80°	0° to 80°	0° to 80°
main boom	-8° to 80°	-8° to 80°	-8° to 80°
material handling max.	363kg	363kg	454kg

Please note that SWL, material handling capabilities, outreach and working height vary according to specification of platform and base vehicle. Above figures are intended as best guide only. Versalift is certified to ISO9001:2000 by TUV UK Quality Assurance Ltd; certificate number GB00468.



features & benefits

Platform capacity from 200kg to 250kg SWL for two person models with safety harness anchor points

Fibreglass duck under style bucket for two-man operation, with integrated finger guard and two harness anchors. Benefits of fibreglass construction include being evidential witness marks from accident damage, a major safety factor as pre-empts evaluation of effects from impacts.



Side mounted heavy duty aluminium telescopic inner boom (steel inner boom on VST5000N) with steel outer boom and turret designed for low stowing of boom

Lower articulated boom (articulates from 0° to 80° above horizontal)

Master / slave hydraulic platform levelling with control for adjusting platform and to tilt for cleanout or rescue

Hydraulic platform rotator, through 180°

360° continuous rotation

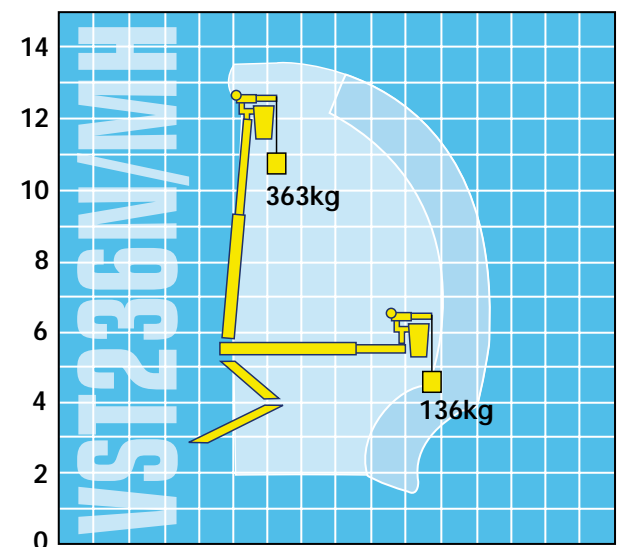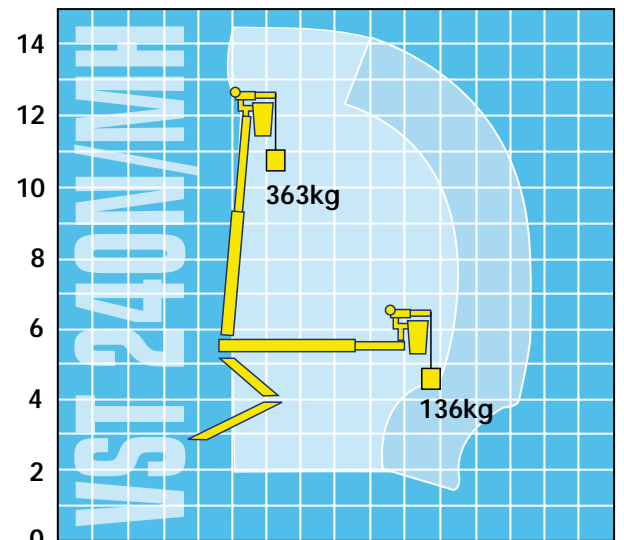

All dimensions in metres

- Reach of VST236N/MH • VST240N/MH (200kg SWL)
- Reach of VST236N/MH • VST240N/MH (250kg SWL/MH)



VST - N/MH

236N/MH • 240N/MH • 5000N/MH
Stabitel - the ideal heavy duty platform



Telescopic boom models



Articulated low boom models



360° continuous



Up to 17.0m



Up to 11.5m



www.versalift.co.uk

1 Altendiez Way, Latimer Park, Burton Latimer, Northants. NN15 5YT
Tel: 01536 721010 Fax: 01536 721111 email: sales@versalift.co.uk

The photographs in this brochure are for promotional purposes only. Specifications are subject to change without notice.

VERSALIFT