

ET Insulated

ET29EIH • T3100I • T3300I • ET36IFH
eurotel - max height for less weight



Insulated 46kv



Telescopic
boom models



110° flyboom
on IFH



Up to 12.4m



Up to 7.3m

VERSALIFT

The Versalift Eurotel insulated platform is a standard duty machine with telescopic main boom complete with single two man bucket (200kg SWL). Primarily designed for lighter weight applications and LV live line work. The 'EIH' part of the number stands for 'European Insulated Hydraulic'. The 'EIH' model benefits from the bucket attached directly to the end of the main boom and as such is better suited to truck mounts, whilst the 'IFH' model incorporates a 110° flyboom for even greater flexibility and operating envelope and suits van mounted applications.

specifications

	ET29EIH	ET36IFH	T3300I	T3100I
max. working height	11m	12.4m	12.0m	11.4m
max. platform height	9m	10.4m	10m	9.4m
max. horizontal outreach	7.3m	7m	7.8m	7.2m
fly boom	n/a	110°	n/a	n/a
main boom	-14° to 74°	-8° to 80°	-20° to 80°	-20 to 80°
bucket rotation	optional	optional	180°	180°
pedestal rotation	non continuous <360°			

ET Models - Fibreglass inner (upper) boom and patented ELEKTROGARD lower fibreglass boom tip, providing 107cm insulation gap for testing per ANSI A92.2 - 1990 for category C, 46kv and below. ELEKTROGARD finished with white urethane paint over white gel coat.

T Models - Fibreglass inner (upper) boom and patented ELEKTROGARD lower fibreglass boom tip, providing 96.5cm insulation gap or testing per ANSI A92.2 - 1990 for category C, 46kv and below. ELEKTROGARD finished with white urethane paint over white gel coat.

Closed fibreglass step over style bucket for two man operation, with integral finger guard and insulating liner, complete with two harness anchors.

Full pressure hydraulic single lever (Unitrol) upper controls, including safety trigger, emergency stop and platform tilt for clean-out and rescue. Optional multistick controls.

Full platform emergency power

Full functions at ground

Please note that outreach and working height vary according to specification of platform and base vehicle.




Above figures are intended as best guide only. Versalift is certified to ISO9001: 2000 by TUV UK Quality Assurance Ltd; certificate number GB00468.



Multistick



Unitrol

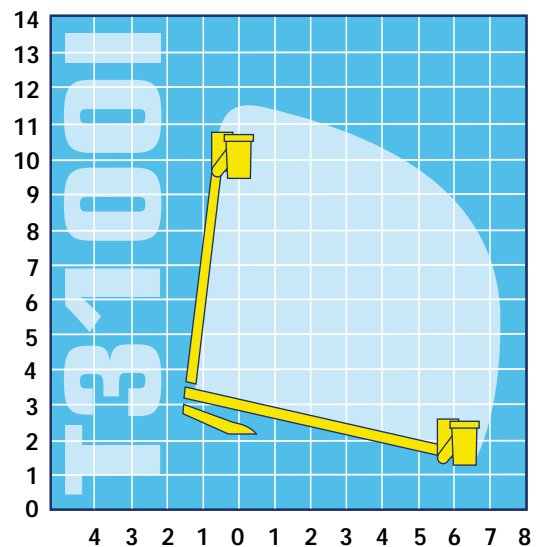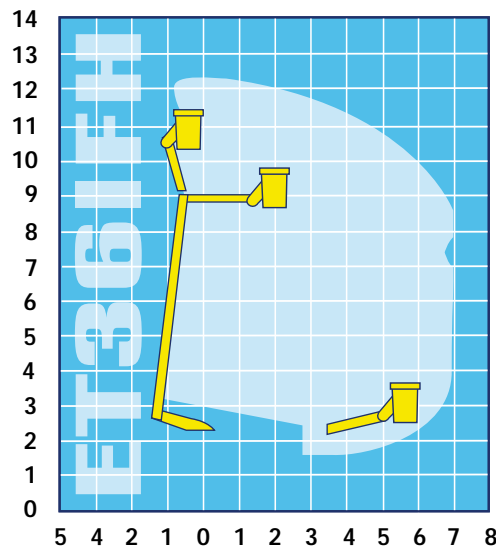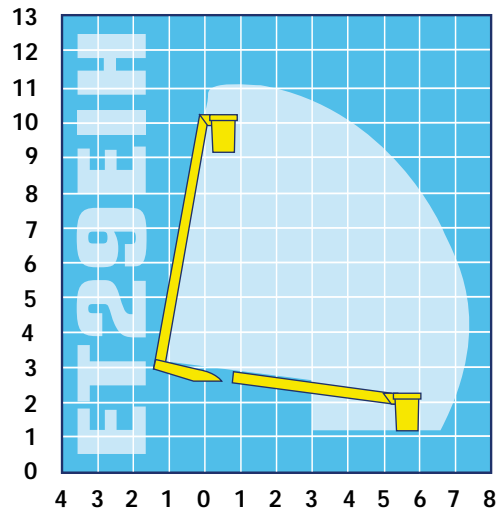

All dimensions in metres

Reach of ET29EIH / ET36IFH / ET3001I



www.versalift.co.uk

1 Altendiez Way, Latimer Park, Burton Latimer, Northants. NN15 5YT

Tel: 01536 721010 Fax: 01536 721111 email: sales@versalift.co.uk

The photographs in this brochure are for promotional purposes only. Specifications are subject to change without notice.