



LAT135-H

LOW VOLTAGE
PICK-UP MOUNTED PLATFORM



FULLY
HYDRAULIC
CONTROL



3.5T GVW



ARTICULATED
BOOM



ON & OFF ROAD



WALK-IN BUCKET



TYPE APPROVED



ISUZU D-MAX SINGLE CAB



TOYOTA HILUX SINGLE CAB

SPECIFICATIONS

	Isuzu D-Max	Toyota Hilux
Working height	13.3m	13.3m
Platform height	11.3m	11.3m
Maximum outreach	6.1m	6.1m
Max. bucket capacity	230kg	230kg
Flyboom	Fixed	Fixed
GVW	3500kg	3500kg
Maximum slope	3° / 5°	3° / 5°
Payload (after driver, passenger & fuel)*	230kg	230kg


*Subject to options fitted

STANDARD

- Mounted on Isuzu D-Max or Toyota Hilux single cab pick-ups
- Fully hydraulic proportional control
- Radial outriggers (front) + A-frame outriggers (rear)
- 230kg SWL walk-in bucket
- Access to bucket from ground
- 1kV certified insulation (annual dielectric test required)
- 12V DC emergency lowering system
- Low travel height <2.6m
- Improved on-road and impressive off-road capability
- Driven on a car licence
- Type Approved

OPTIONS

- Tow bar with 12V electrics
- Chapter 8 compliance
- Emergency manual hand pump
- Bespoke locker installation

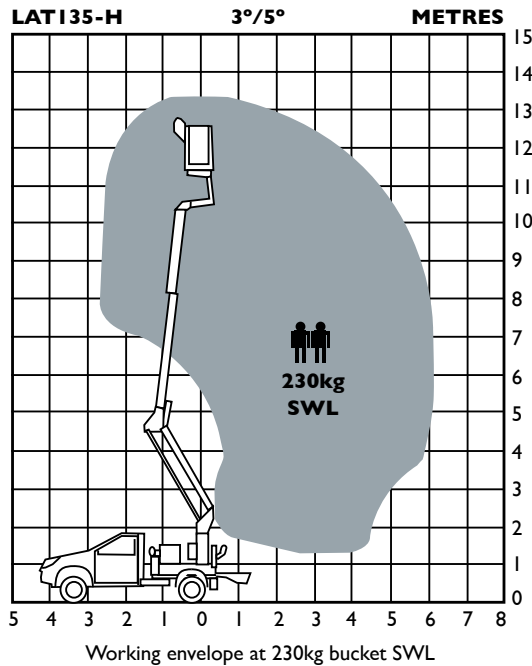

Improved driving experience on-road and impressive off-road capability



Safe access to bucket from ground

LAT135-H

LOW VOLTAGE
PICK-UP MOUNTED PLATFORM



Easy to use fully hydraulic proportional control



Improved stability via radial outriggers (front) + A-frame outriggers (rear), reducing stress to chassis



Safe access to bucket from vehicle



Hydraulic and 12V DC emergency ground controls

The photographs in this brochure are for promotional purposes only. Specifications are subject to change without notice.



1 Altendiez Way,
Latimer Park,
Burton Latimer,
Kettering, NN15 5YT
T: 01536 721010
F: 01536 721111
E: sales@versalift.co.uk
W: www.versalift.co.uk



TRACK MOUNTED



PICK-UP MOUNTED



VAN MOUNTED



CHASSIS MOUNT



TRUCK MOUNTED



INSULATED PLATFORM



Revision: 05/16/01

www.versalift.co.uk