



# VDT170-F

## VAN MOUNTED PLATFORM



5.0T GVW



200°  
FLYBOOM



NO TAIL SWING



17.1m DOUBLE  
TELESCOPIC  
BOOM



FPC  
CONTROLS



CLASS LEADING  
PAYLOAD



TYPE  
APPROVED



## SPECIFICATIONS

5.0 T GVW 4x2  
Mercedes Sprinter

Working height	17.1m
Platform height	15.1m
Max. outreach at:	
120kg	9.0m
200kg	8.0m
230kg	7.7m
Max. bucket capacity	230kg
Flyboom	200°
GVW	5000kg
Max. slope	5° / 10°
Payload available (after driver, passenger & fuel) *	500kg

\*Subject to options fitted

## STANDARD

- Double telescopic boom with 17.1m working height
- 200° flyboom
- No knuckle tail swing
- FPC - Full Proportional CANbus controls with display
- 12V DC emergency lowering system
- Up-under radial stabilisers
- 230kg SWL walk-in bucket
- Class-leading payload
- Type Approved

## OPTIONS

- 1kV certified insulation
- Home function
- Chapter 8 compliance
- Bespoke storage racking
- Direct access to load area from cabin
- Sprinter 4x4 installation

# VDT170-F

VAN MOUNTED PLATFORM



Up to 9.0m maximum outreach



17.1m double telescopic boom on compact chassis



Sophisticated FPC controls with optional Home function for self docking




Optional direct access to load area from cabin

The photographs in this brochure are for promotional purposes only. Specifications are subject to change without notice.



Platform mounted on a 5.0T GVW Mercedes Sprinter

## VDT170-F METRES

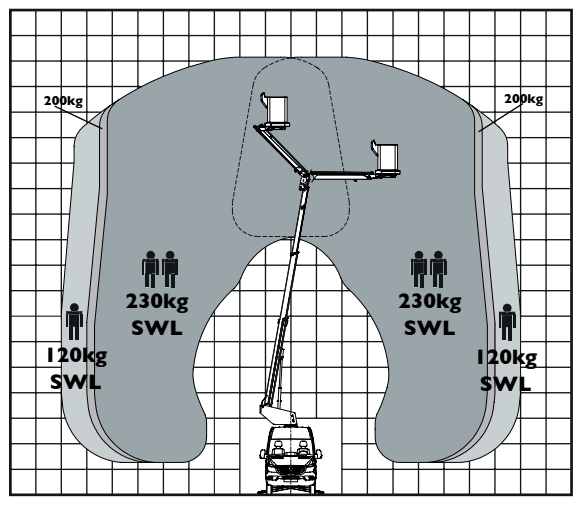

Working envelope at 120kg, 200kg & 230kg bucket SWL



1 Altendiez Way,  
Latimer Park,  
Burton Latimer,  
Kettering, NN15 5YT  
T: 01536 721010  
F: 01536 721111  
E: sales@versalift.co.uk  
W: www.versalift.co.uk



TRACK MOUNTED



PICK-UP MOUNTED



VAN MOUNTED



CHASSIS MOUNT



TRUCK MOUNTED



INSULATED PLATFORM