



# VT145-F

## VAN MOUNTED PLATFORM



5.0T GVW



200°  
FLYBOOM



NO TAIL SWING



FPC  
CONTROLS



CLASS LEADING  
PAYLOAD



TYPE  
APPROVED



## SPECIFICATIONS

5.0 T GVW 4x2  
Mercedes Sprinter

Working height	14.6m
Platform height	12.6m
Max. outreach at:	
120kg	9.5m
200kg	8.3m
230kg	7.9m
265kg	7.3m
Max. bucket capacity	265kg
Flyboom	200°
GVW	5000kg
Max. slope	5° / 10°
Payload available (after driver, passenger & fuel) *	530kg

\*Subject to options fitted

## STANDARD

- High strength telescopic boom
- 200° flyboom
- No knuckle tail swing
- FPC - Full Proportional CANbus controls with display
- 12V DC emergency lowering system
- Up-under radial stabilisers
- 265kg SWL walk-in bucket
- Class-leading payload
- Type Approved

## OPTIONS

- 1kV certified insulation
- Home function
- Chapter 8 compliance
- Bespoke storage racking
- Direct access to load area from cabin
- Sprinter 4x4 installation

# VT145-F

## VAN MOUNTED PLATFORM




Up to 9.5m maximum outreach



No tail swing outside the mirrors of the vehicle for improved safety



Sophisticated FPC controls with optional Home function for self docking

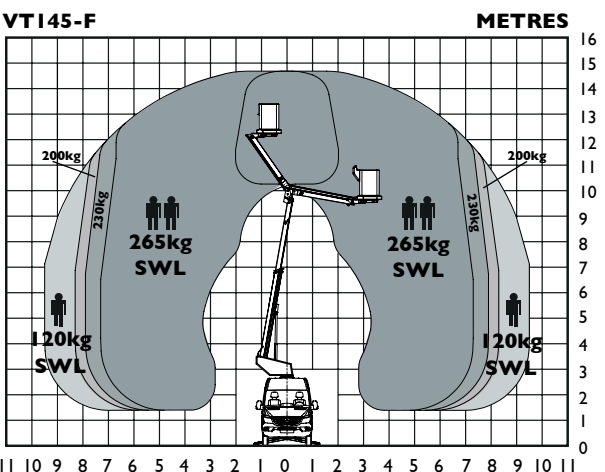

Working envelope at 120kg, 200kg, 230kg & 265kg bucket SWL



Platform mounted on a 5.0T GVW Mercedes Sprinter



Optional direct access to load area from cabin

The photographs in this brochure are for promotional purposes only. Specifications are subject to change without notice.



1 Altendiez Way,  
Latimer Park,  
Burton Latimer,  
Kettering, NN15 5YT  
T: 01536 721010  
F: 01536 721111  
E: sales@versalift.co.uk  
W: www.versalift.co.uk

