



VTX-240 6

CHASSIS MOUNTED PLATFORM



3.5T GVW



24.2M
ARTICULATED
BOOM



FPC
CONTROLS



H-FRAME
OUTRIGGERS



TYPE
APPROVED



EURO 6
COMPLIANCE

SPECIFICATIONS

Working height	24.2m
Platform height	22.2m
Max. outreach at:	
80kg	12.5m
120kg	11.2m
200kg	9.0m
220kg	8.2m
Max. basket capacity	220kg
GVW	3500kg
Max. slope	1° / 1°

3.5T GVW Mercedes Sprinter
Chassis Cab 4325mm WB

VTX-240

CHASSIS MOUNTED PLATFORM



Low travel height



Easy to use full proportional (FPC) CANbus controls with display



The ability to work over rooftops to access difficult to reach areas is aided by a flat bottomed basket



Compact H-frame outriggers


The photographs in this brochure are for promotional purposes only. Specifications are subject to change without notice.

STANDARD

- Easy to use full proportional (FPC) CANbus controls with display
- Articulated boom
- Extendable H-frame outriggers to rear
- Emergency hand pump
- Two person walk-in aluminium basket (front mounted flat bottomed)
- 220kg SWL basket
- Outreach load sensing system
- Home function
- Euro 6 compliance
- Designed to work up to 3.0m below ground level

OPTIONS

- Amber LED beacons (front & rear)
- Hi-Vis chevrons
- Chapter 8 compliance

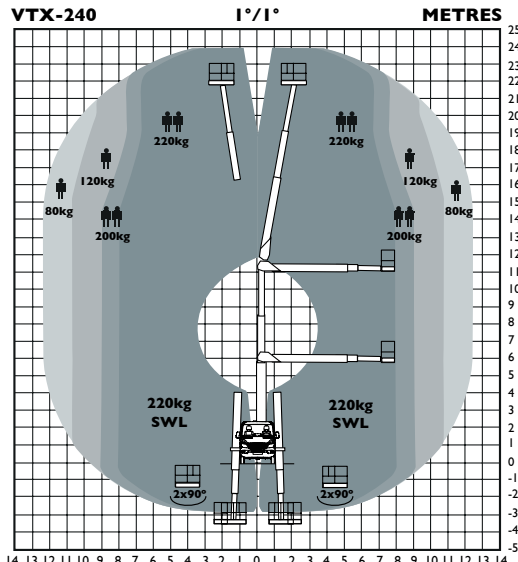

Working envelope at 80/120/200/220kg bucket SWL



Ability to access below ground



1 Altendiez Way,
Latimer Park,
Burton Latimer,
Kettering, NN15 5YT
T: 01536 721010
F: 01536 721111
E: sales@versalift.co.uk
W: www.versalift.co.uk

