

VERSALIFT VTM-170-F

Van mounted telescopic platform



Iveco Daily 70C
(7,000kg GVW)



LMC controls with
variable outreach



Emergency lowering
controls in pedestal



Knuckle/turret tail
swing within the mirrors.



Outriggers within
the mirrors

VERSALIFT VTM-170-F

UK

Specifications



Dimensions




Length: 8,465cm **Height:** 3,700cm **Wheelbase:** 4,100cm

Optional equipment

- Bespoke storage racking
- Twin joystick LMC control system with LCD interface screen
- Walk-in or Duck-under bucket
- 1kV certified insulation
- Chapter 8 compliance
- Stabiliser controls from bucket
- Slew rotation interlock
- Reversing camera
- Bucket rotator (2 x 90°)***

Diagrams

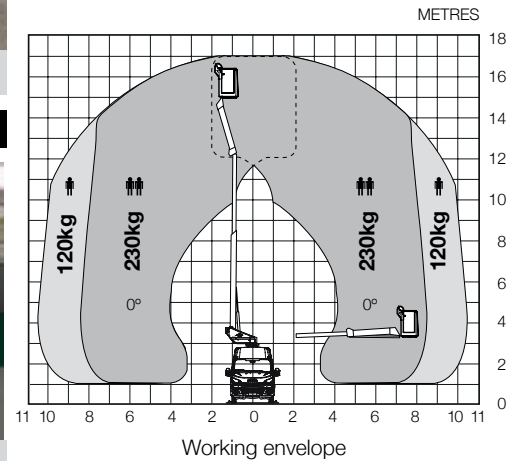

Working envelope

Key features



Manufactured from ultra-high strength steel, a profiled boom delivers exceptional rigidity, strength and smooth platform operation. For low maintenance, integrated boom wear pads now follow this profile.



Pedestal mounted emergency lowering valves, located at ground level within load area are safe and easy to access.



Impressive outreach with LMC load sensing system. A-frame outriggers and tail swing of turret within the mirrors of the vehicle for improved safety.



Optional twin joystick IPC control system enables load dependent variable outreach and up to two actions simultaneously.

Notes

Technical information is subject to change without notice. Images may show optional equipment.

*Depending on the vehicle and subject to options fitted

**Max. payload after driver, passenger and fuel and subject to options fitted

***Reduced outreach

Revision: 04/2019